Here are 2 simple ways to apply your lettering:

Dry Application - Ideal for vinyl lettering

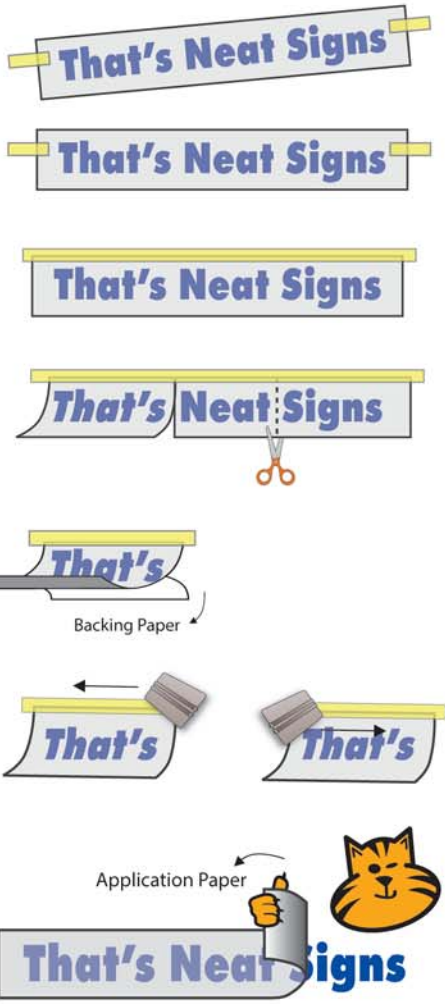

1 - Position lettering complete with application paper and backing roughly where required.

2 - Hold in place with masking (or similar) tape.

3 - Adjust position until the text is level or exactly where required.

4 - Stick a strip of tape along the entire top edge.

5 - You can now cut between the lettering to make more manageable pieces.

6 - Working on one section at a time, hinge the lettering section up on the tape and pull down the backing paper ensuring the lettering remains on the top application paper.

7 - With the backing paper removed apply the lettering. Using a squeegee (or similar) apply pressure in a sidewards motion, gradually moving down.

8 - Continue with the other sections of lettering.

9 - Carefully remove the top application tape to leave only the vinyl.

10 - Any bubbles can be pricked with a pin or sharp knife and pressed down.

11 - Stand back and admire

12 - Tell your friends about That's Neat Signs.

That's Neat Signs

Wet Application

Fill a clean spray bottle with clean water and add a few drops of washing-up liquid (just enough to break the surface tension and give a little bit of slip)

1 - Spray a generous film of the water solution on the surface

2 - Remove backing from graphic and place in position.

3 - The soapy water solution should give you enough slip to adjust the graphic to the desired position without it actually sticking.

4 - From the centre carefully squeegee out the water. (using a plastic squeegee or piece of rigid card or plastic)

5- Allow to dry before carefully removing the application paper.

6 - Place the old backing paper over the graphic and rub over firmly with the squeegee to make sure all edges are down.

7. Great Job ! That's Neat !